

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
19 May 2005 (19.05.2005)


PCT

(10) International Publication Number  
**WO 2005/044668 A1**

- (51) International Patent Classification<sup>7</sup>: **B65B 33/00**, B05D 7/00, C23C 18/00 (74) Agent: ANTOINETTE M. TEASE, P.L.L.C.; P.O. Box 51016, Billings, MT 59105 (US).
- (21) International Application Number: PCT/US2004/035090 (81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 25 October 2004 (25.10.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/517,186 3 November 2003 (03.11.2003) US (84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and  
(72) Inventor: RYAN, John, F. [US/US]; 1915 35th St., Missoula, MT 59801 (US).
- (72) Inventors; and  
(75) Inventors/Applicants (*for US only*): ROSENTHAL, Eric [US/US]; 700 Shore Rd., Apt. 7AA, Long Beach, NY 11701 (US). GRANITO, Richard, P. [US/US]; 114 Sullivan Drive, Georgetown, FL 32139 (US).
- Declaration under Rule 4.17:  
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: SPRAY-ON PAINT PROTECTION FILM AND METHOD OF APPLYING SAME

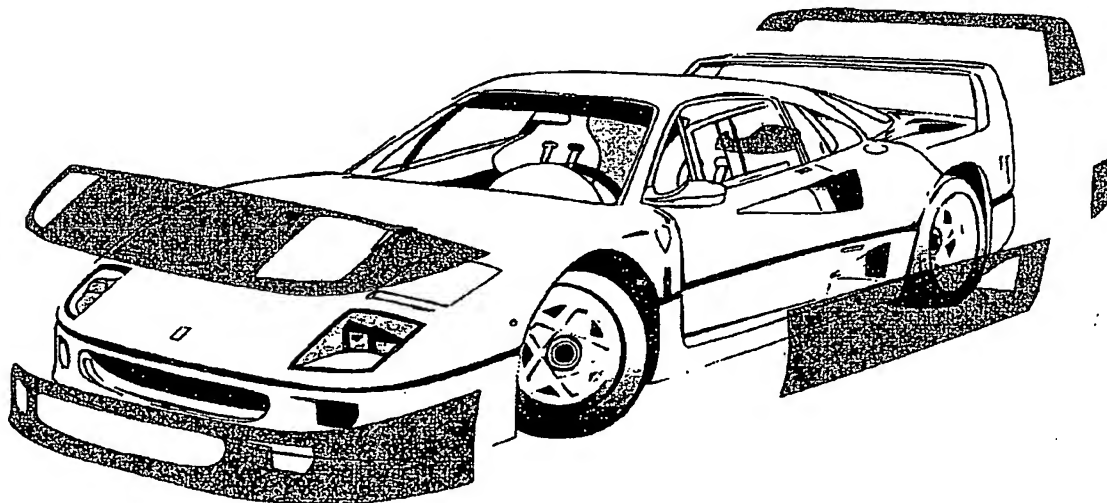

(57) Abstract: A method of protecting the paint on a vehicle from being chipped, scratched or corroded, comprising the steps of: (a) masking off those parts of the vehicle that are not to be coated; (b) spraying the remaining parts of the vehicle with a clear, protective coating to a thickness of four to fourteen mils or to a thickness that is three to five times the thickness of an OEM clear coat; (c) allowing the vehicle to air dry or force curing the vehicle with heat lamps; and (d) unmasking the vehicle. A spray-on protection film comprising a mixture of polyester resins and a high solids aliphatic polyisocyanate resin hardener, wherein the film is sprayed onto all or part of a vehicle to a thickness of four to fourteen mils or to a thickness that is three to five times the thickness of an OEM clear coat.



**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*